





Heyco® Right Angle Strain Relief Bushings

For Round Cables

- Provides the same protection for your power supply cable as the straight-thru type AND...
- Exits the cable flush against the panel, saving space and directing the cable parallel to the panel.
- Overcomes space limitations and acts as a back or bottom bumper.
- Standardize panel design! Fill unused SR mounting holes with Heyco Double "D" Plugs, page 3-23.
- See pages 3-24, 3-25, and 3-26 for SR hole punches and assembly tools.

WILL FIT THESE CABLES			PANEL DIMENSIONS				PART NO.	DESCRIPTION	PART DIMENSIONS			
UL Type Designation	AWG/ Conductors	Approx. Diameter	A Mounting Hole Dia.	B To Prevent Rotation	Maximum Panel Thickness ¹				C Head Length	D Body Length		
		in. mm.	in. mm.	in. mm.	in. mm.	in. mm.	Black	in.	mm.	in.	mm.	
SV & SVT	18/2	.250 6,3	.500 12,7				1374	SR 15-1	.390 9,9	.687 17,5		
	18/3	.265 6,7	.500-.515 12,7-13,1	.450 11,4	.100 2,5							
HPD	18/2	.270 6,9	.500 12,7				1320	SR 10-2	.562 14,3	.968 24,6		
	16/2	.290 7,4	.500-.515 12,7-13,1									
SJ, SJT & SJO	18/2	.300 7,6	.625 15,9	.550 14,0	.125 3,2	3,2	1320	SR 10-2	.562 14,3	.968 24,6		
	16/2	.325 8,3										
	18/3	.330 8,4										
	16/3	.330 8,4										
SJ, SJT & SJO	16/2	.325 8,3	.625 15,9	.550 14,0	.125 3,2	3,2	1327	SR 11-2	.562 14,3	.968 24,6		
	18/3	.330 8,4										
	16/3	.355 9,0										
Same as SR 11-2 above except						.200 5,1	1330	SR 11K-2	.562 14,3	.968 24,6		
SJT	18/4	.360 9,1					1397	SR 17-2	.640 16,3	1.093 27,7		
	14/3	.370 9,4										
S & ST	18/2	.390 9,9	.750 19,0	.660 16,8	.125 3,2	3,2	1397	SR 17-2	.640 16,3	1.093 27,7		
	18/3	.405 10,3										
	16/2	.405 10,3										
	16/3	.430 10,9	.750-.781 19,0-19,8									

Standard color black. Consult Heyco for white and other colors.
¹Maximum Panel Thickness-Part has additional clearance.

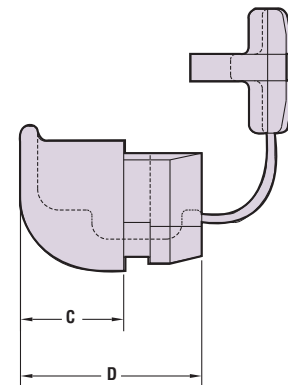

Quick Specs

Material: 6/6 Nylon
 Certifications: Recognized under the Component Program of Underwriters' Laboratories File E15331
 Certified by the Canadian Standards Association File LR8919
 Flammability Rating: 94V-2
 Material Temperature Index: 257°F (125°C)-Maximum temperature on part not to exceed 221°F (105°C)